



UNI STREAM DC CHARGER

Intelligent Integration, Flexible Deployment



Compact & Versatile

Saves space; supports wall-mounted or free-standing installation for flexible deployment.



Smart Safety

Multi-layer protection (overvoltage, short circuit, leakage, etc.) with emergency stop.



Smart Control

Built-in data storage and fault detection; supports remote power cutoff for back-end management.



All-Weather Durability

IP54-rated protection, ensuring stable operation in various indoor and outdoor environments.




User-Friendly Interface


Clear, dynamic UI; supports RFID cards and QR code scanning, making charging simple and convenient.



Specification		
Output Power	30 kW	60 kW
Technical Features		
Input Voltage	300 VDC ~ 850 VDC	
Efficiency	>96%	
Output Voltage Range	CCS: 300 ~ 1000 VDC	
Output Current Range	0 ~ 100A	0 ~ 200A*2
Communication	OCPP 1.6 J (TLS)	
Display	LCD 7 inch touch screen	
Versatility	Conform to UL2954, UL2231-1/-2	
Energy Meter	CE certified	ETL certified
RCD	Type A or Type B (optional)	
Safety Design	Over/under voltage protection, overload protection, current leakage protection, grounding protection, lightning surge protection	
DC Connector	CCS1 / CCS2, 5 meters cable	CCS1 *2 / CCS2 *2 / CCS1 + CCS2, 5 meters cable
Physical Properties		
Dimensions (main body)	W471*H665*D230mm	W651*H815*D243mm
Protection Class	IP54	
Installation Method	Wall-mount or pedestal (optional)	
Noise	<55DB in all directions	
Operating Temperature	-20 ~ +50°C	
Humidity	Max.95% (non-regulating)	
Warranty	2 years	

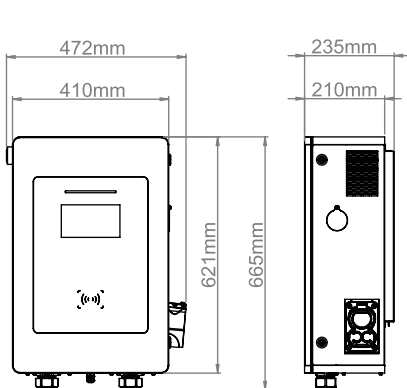

• 30 kW Dimensions (mm)

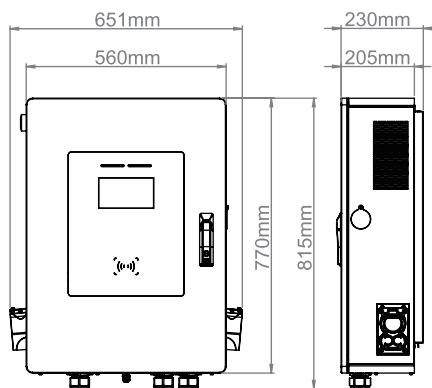

• 60 kW Dimensions (mm)

